Canon

DIGITAL RADIOGRAPHY

CXDI-50G

User's Manual

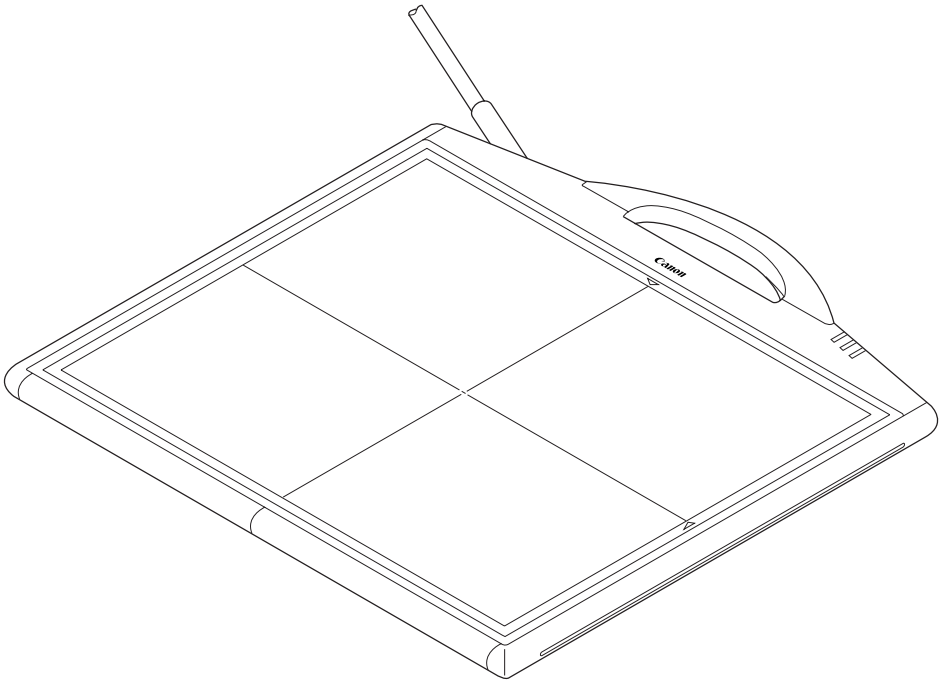

Before using the instrument, be sure to read this manual thoroughly.
Also, read the manuals of other instruments in the system.
Keep the manual where it is easily accessible.

PLEASE NOTE

1. The user is responsible for the use and maintenance of the product.
   We suggest that a member of the user's staff be designated as being in charge of maintenance so as to ensure that the product is kept in a safe and good condition.
   Also, medical products must be used only by a qualified person.

2. Roentgenography, image processing, reading of image, and storage of data must be performed in accordance with the law of the country where the product is being used.
   Also, the user is responsible for maintaining the privacy of image data.

3. In no event will Canon be liable for direct or indirect consequential damage arising out of the use of this product. Canon will not be liable for loss of image data due to any reason.

4. This product may malfunction due to electromagnetic waves caused by portable personal telephones, transceivers, radio-controlled toys, etc. Be sure to avoid having objects such as these, which affect this product, brought near the product.

5. Canon reserves the right to change the specifications, configuration and appearance of the product without prior notice.

System and product names in this manual are the trademarks of each manufacturer that developed them.

© CANON INC. 2005

All rights reserved.
Under copyright laws, this manual may not be copied, in whole or in part, without the written consent of Canon.

Safety Information

Regulations

For U.S.A.
Do not make any changes or modifications to the equipment unless otherwise specified in the manual. If such changes or modifications should be made, you could be required to stop operation of the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC rules.
These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment.
This equipment generates, uses, and can radiate radio frequency energy and, if not installed ad used in accordance with the instruction manual, may cause harmful interference to radio communications.
Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

Use of shielded cable is required to comply with class A limits in Subpart B of Part 15 of FCC rules.

This instrument is a CLASS I EQUIPMENT according to UL2601-1.

MEDICAL ELECTRICAL EQUIPMENT
WITH RESPECT TO ELECTRIC SHOCK,
FIRE AND MECHANICAL HAZARDS
ONLY IN ACCORDANCE WITH UL2601-1.
41C4

WITH RESPECT TO ELECTRIC SHOCK,
FIRE , MECHANICAL AND OTHER SPECIFIED HAZARDS ONLY
IN ACCORDANCE WITH CAN/CSA C22.2 NO. 601.1,
MEDICAL EQUIPMENT CERTIFIED FOR CANADA

For EU Countries
The following mark shows compliance of the instrument with Directive 93/42/EEC.

CE 0197

This instrument complies with the standards EN60601-1, EN60601-1-1, EN601-1-2, EN601-1-3 and EN60601-2-32.

This instrument conforms to IEC 60601-1-2:2001.

This instrument is a CLASS I EQUIPMENT according to EN 60601-1.

Guidance and Manufacturer's Declaration – Electromagnetic Emissions

The CXDI-50G is intended for use in the electromagnetic environment specified below. The user of the CXDI-50G should assure that it is used in such an environment.

Emission Test	Compliance	Electromagnetic Environment – Guidance
RF emissions CISPR 11	GROUP 1	The CXDI-50G uses RF energy only for its internal function. Therefore, its RF emissions are very low and are not likely to cause any interference in nearby electromagnetic equipment.
RF emissions CISPR 11	Class A	The CXDI-50G is suitable for use in all establishments other than domestic and those directly connected to the public low-voltage power supply network that supplies buildings used for domestic purposes.
Harmonic emissions IEC 61000-3-2	Not Applicable	
Voltage fluctuations/ flicker emissions IEC 61000-3-3	Complies	

Immunity Test	IEC 60601 Test Level	Compliance Level	Electromagnetic Environment – Guidance
Electrostatic discharge (ESD) IEC 61000-4-2	±(2, 4, 6) kV contact ±(2, 4, 8) kV air	±(2, 4, 6) kV contact ±(2, 4, 8) kV air	Floors should be wood, concrete or ceramic tile. If floors are covered with synthetic material, the relative humidity should be at least 30%.
Electrical fast transient/burst IEC 61000-4-5	±2 kV for power supply lines ±1 kV for input/output lines	±2 kV for power supply lines ±1 kV for input/output lines	Mains power quality should be that of a typical commercial or hospital environment.
Surge IEC 61000-4-5	±1 kV differential mode ±2 kV common mode	±1 kV differential mode ±2 kV common mode	Mains power quality should be that of a typical commercial or hospital environment.

Immunity Test	IEC 60601 Test Level	Compliance Level	Electromagnetic Environment – Guidance
Voltage dips, short interruptions and voltage variations on power supply input lines IEC 61000-4-11	<5% U_T (>95% dip in U_T) for 0.5 cycle. 40% U_T (60% dip in U_T) for 5 cycles 70% U_T (30% dip in U_T) for 25 cycles <5% U_T (>95% dip in U_T) for 5 sec.	<5% U_T (>95% dip in U_T) for 0.5 cycle. 40% U_T (60% dip in U_T) for 5 cycles 70% U_T (30% dip in U_T) for 25 cycles <5% U_T (>95% dip in U_T) for 5 sec.	Mains power quality should be that of a typical commercial or hospital environment. If the user of the CXDI-50G requires continued operation during power mains interruptions, it is recommended that the CXDI-50G be powered from an uninterruptible power supply.
Power frequency (50/60Hz) magnetic field IEC 61000-4-8	3 A/m	3 A/m	Power frequency magnetic fields should be at levels characteristic of a typical location in a typical commercial or hospital environment.
NOTE: U_T is the a.c. mains voltage prior to application of the test level.			

Immunity Test	IEC 60601 Test Level	Compliance Level	Electromagnetic Environment – Guidance
Conducted RF IEC 61000-4-6	3 Vrms 150 kHz to 80 MHz	3V	Portable and mobile RF communications equipment should be used no closer to any part of the CXDI-50G, including cables, than the recommended separation distance calculated from the equation applicable to the frequency of the transmitter. Recommended separations distance $d = 1.2\sqrt{P}$ $d = 1.2\sqrt{P}$ 80 MHz to 800 MHz $d = 2.3\sqrt{P}$ 800MHz to 2.5 GHz where P is the maximum output power rating of the transmitter in watts (W) according to the transmitter manufacturer and d is the recommended separation distance in metres (m). Field strengths from fixed RF transmitters, as determined by an electromagnetic site survey[a], should be less than the compliance level in each frequency range[b]. Interference may occur in the vicinity of equipment marked with the following symbol:
Radiated RF IEC 61000-4-3	3 V/m 80 MHz to 2.5 GHz	3 V/m	

NOTE 1: At 80 MHz and 800 MHz, the higher frequency range applies.

NOTE 2: These guidelines may not apply in all situations. Electromagnetic propagation is affected by absorption and reflections from structures, object and people.

[a] Field strengths from fixed transmitters, such as base stations for radio (cellular/cordless) telephones and land mobile radios, amateur radio, AM and FM radio broadcast and TV broadcast cannot be predicted theoretically with accuracy. To assess the electromagnetic environment due to fixed RF transmitters, an electromagnetic site survey should be considered. If the measured field strength in the location in which the CXDI-50G is used exceeds the applicable RF compliance level above, the CXDI-50G should be observed to verify normal operation. If abnormal performance is observed, additional measures may be necessary, such as reorienting or relocating the CXDI-50G.

[b] Over the frequency range 150 kHz to 80 MHz, field strengths should be less than 3 V/m.

General Safety Information

Follow the safety instructions in this manual and all warnings and cautions printed on the warning labels. Ignoring such cautions or warnings while handling the product may result in injury or accident. Be sure to read and fully understand the manual before this product.
Keep this manual for future reference.

Meaning of Caution Signs

⚠ WARNING	This indicates a potentially hazardous situation which, if not heeded, could result in death or serious injury to you or others.
⚠ CAUTION	This indicates hazardous situation which, if not heeded, may result in minor or moderate injury to you or others, or may result in machine damage.
NOTE	This is used to emphasize essential information. Be sure to read this information to avoid incorrect operation.

Environment of Use and Storage

⚠ WARNING	Do not use or store the instrument near any flammable chemicals such as alcohol, thinner, benzine, etc. Also, this instrument is not a category AP or APG equipment. If chemicals are spilled or evaporate, it may result in fire or electric shock through contact with electric parts inside the instruments. Also, some disinfectants are flammable. Be sure to take care when using them.
⚠ CAUTION	Do not install the instrument in a location with the conditions listed below. Otherwise, it may result in failure or malfunction, fall or cause fire or injury. - Close to facilities where water is used. - Where it will be exposed to direct sunlight. - Close to air-conditioner or ventilation equipment. - Close to heat source such as a heater. - Prone to vibration. - Insecure place. - Dusty environment. - Saline or sulfurous environment. - High temperature or humidity. - Freezing or condensation.

Installation Operation

⚠ WARNING	Do not connect the instrument with anything other than specified. Otherwise, it may result in fire or electric shock.

Power Supply

⚠ WARNING	Be sure to turn OFF the power of each instrument before connecting or disconnecting the cables. Also, do not handle them with wet hands. Otherwise, you may get an electric shock that may result in death or serious injury.
⚠ WARNING	Be sure to hold the plug or connector to disconnect the cable. If you pull the cable, the core wire may be damaged, resulting in fire or electric shock.
⚠ WARNING	Do not cut or process the cables. Also, do not place anything heavy, including the instrument on it, step on it, pull it, bend it, or bundle it. Otherwise, the cable may be damaged, which may result in fire or electric shock.
⚠ WARNING	Do not turn ON the system power when condensation is formed on the instrument. Otherwise, it may result in fire or electric shock.
⚠ CAUTION	Because the instrument's cable is long, take care so cables do not get tangled during use. Also, be careful not to get your feet caught in the cable.

Handling

⚠ WARNING	Always be sure to keep checking the condition of the system and the patient to ensure they are normal during the use of the instrument. If any problem is found, take appropriate measures, such as stopping the operation of the instrument, as required.
⚠ WARNING	Never disassemble or modify the product as it may result in fire or electric shock. Also, since the instrument incorporates parts that may cause electric shocks and other hazardous parts, touching them may cause death or serious injury.
⚠ WARNING	Do not hit or drop the instrument. The instrument may be damaged if it receives a strong jolt, which may result in fire or electric shock if the instrument is used without it being repaired.
⚠ WARNING	Wipe the CFRP plate of the sensor unit with ethanol or glutaraldehyde solution to disinfect it each time a different patient uses the instrument, in order to prevent infection. If the optional grid unit is being used, disinfect its surface. Please consult a specialist for the procedure for disinfection.
⚠ CAUTION	Do not spill liquid or chemicals onto the instrument or, in cases where the patient is injured, allow it to become wet with blood or other body fluids, as doing so may result in fire or electric shock. In such situation, protect the instrument with disposable covering as necessary.
⚠ CAUTION	Turn off the power of each instrument for safety when they are not going to be used.

When Problem Occurs

⚠ WARNING	Should any of the following occur, immediately turn OFF the power of each instrument, unplug the power cable from the AC outlet, and contact Canon representative or distributor. - When there is smoke, odd smell or abnormal sound. - When liquid has been spilled into the instrument or a metal object has entered through an opening. - When the instrument has been dropped and it is damaged.

Maintenance and Inspection

⚠ WARNING	For safety reasons, be sure to turn OFF the power of each instrument when the inspections indicated in this manual are going to be performed. Otherwise, it may result in electric shock.
⚠ WARNING	When the instrument is going to be cleaned, be sure to turn OFF the power of each instrument, and unplug the power cable from the AC outlet. Never use benzine, thinner or any other flammable cleaning agents. Otherwise, fire or electric shock may result.
⚠ WARNING	Clean the plug of the power cable periodically by unplugging it from the AC outlet and removing dust or dirt from the plug, its periphery and AC outlet with a dry cloth. If the cable is kept plugged in for a long time in a dusty, humid or sooty place, dust around the plug will attract moisture, and this could cause insulation failure which could result in a fire.
⚠ WARNING	The instrument must be repaired by a qualified engineer only. If it is not repaired properly, it may cause fire, electric shock, or accident.
⚠ CAUTION	For safety reasons, be sure to inspect the instrument before using it.

Labels and Markings on the Instrument

The CXDI-50G has a few labels and markings on it.
Contents of those and positions where they are attached are indicated below.

Sensor Unit

Front

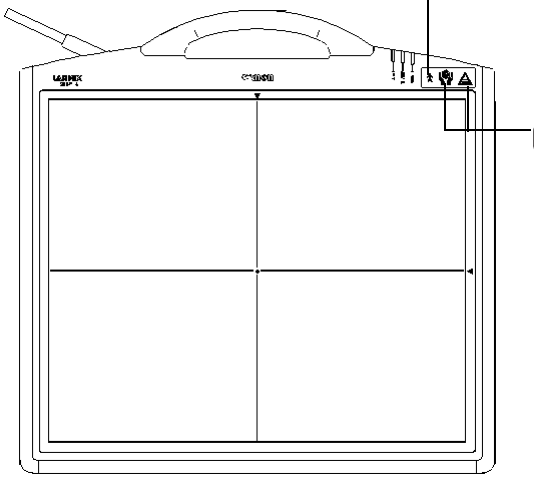

This mark indicates that this is a Type B Applied Part according to UL2601-1 and EN60601-1.
This unit can be installed in the patient environment.

These marks indicate that the instrument must be handled with care.
Do not jolt or apply excessive load to the instrument.

Rear

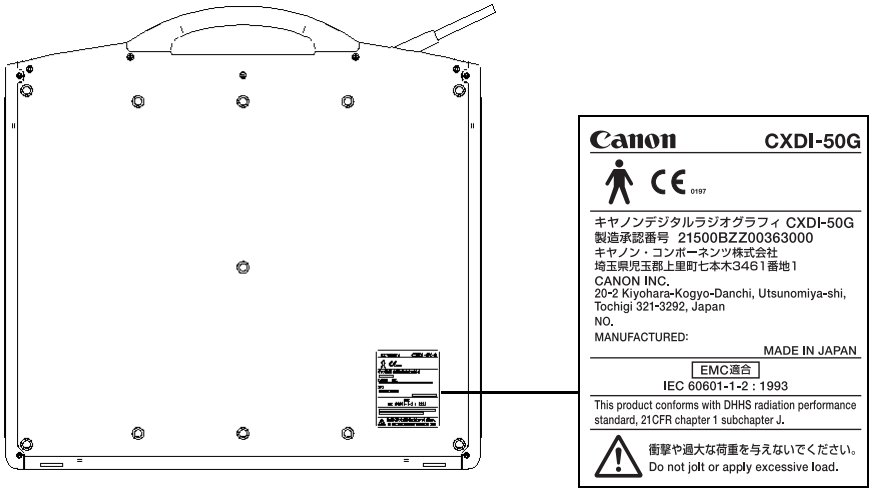

Name Label

Power Box

Bottom

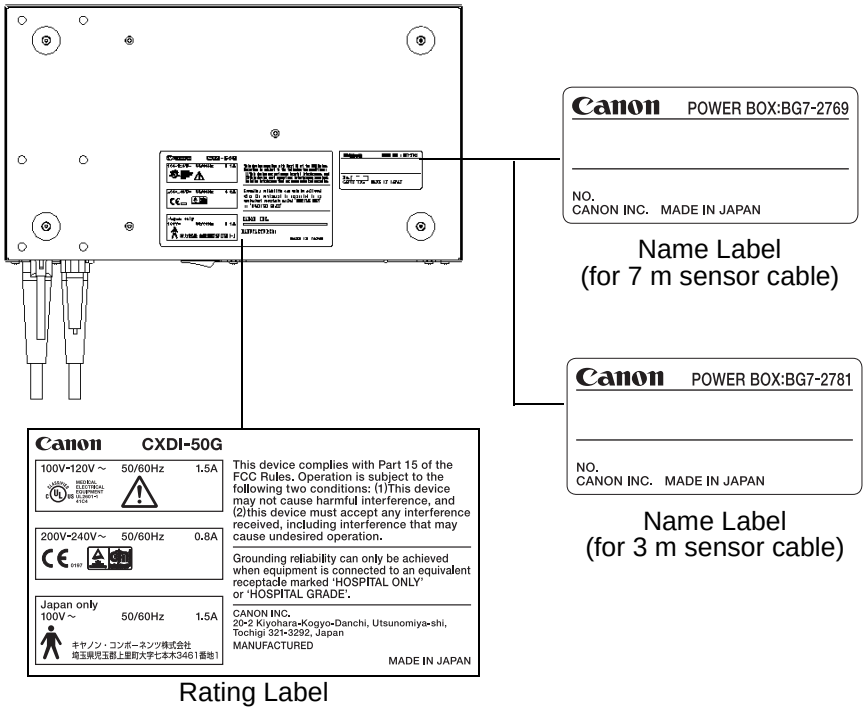
Canon POWER BOX:BG7-2769
NO.
CANON INC. MADE IN JAPAN
Canon POWER BOX:BG7-2781
NO.
CANON INC. MADE IN JAPAN
Canon CXDI-50G
100V-120V ~ 50/60Hz 1.5A
200V-240V ~ 50/60Hz 0.8A
Japan only
100V ~ 50/60Hz 1.5A
キヤノン・コンポーネンツ株式会社
埼玉県児玉郡上里町大字七本木3461番地1
This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1)This device may not cause harmful interference, and (2)this device must accept any interference received, including interference that may cause undesired operation.
Grounding reliability can only be achieved when equipment is connected to an equivalent receptacle marked 'HOSPITAL ONLY' or 'HOSPITAL GRADE'.
CANON INC.
20-2 Kiyohara-Kogyo-Danchi, Utsunomiya-shi, Tochigi 321-3292, Japan
MANUFACTURED
MADE IN JAPAN

Name Label
(for 7 m sensor cable)

Name Label
(for 3 m sensor cable)

Rating Label

Contents

Safety Information ..... (1)
- Regulations ..... (1)
- General Safety Information ..... (2)
- Labels and Markings on the Instrument ..... (5)

1. Overview 1

2. Notes for Using the Instrument 2

3. Description 5
- 3.1 Sensor Unit 5
- 3.2 Power Box 6
- 3.3 Remote Switch 6

4. Operation 7
- 4.1 Turning ON the Power of the System 7
- 4.2 Turning OFF the Power of the System 7
- 4.3 Calibration 7

5. Inspection and Maintenance 8
- 5.1 Inspection 8
- 5.2 Cleaning 11

6. Service Information 12

7. Specifications 13
- 7.1 Main Specifications 13
- 7.2 Characteristics 14

8. Components 16

9. Dimensions 17
- 9.1 Sensor Unit 17
- 9.2 Power Box 18
- 9.3 Remote Switch 18

Appendix: Attaching the Optional Grid Unit 19

This page has been left intentionally blank.

1. Overview

The *Canon Digital Radiography CXDI-50G* is a portable X-ray digital camera that can take images of any part of the body.
It directly converts the X-ray images captured by the LANMIT (Large Area New MIS Sensor and TFT) sensor into a high-resolution digital images.

2. Notes for Using the Instrument

Handling

Handle the instrument carefully, as it may be damaged if something is hit against it, dropped, or receives a strong jolt.
Also, handle the optional grid unit with care too.

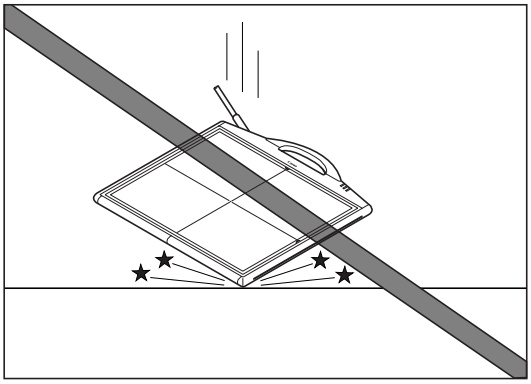

Do not pull the cable. Also, do not pull the sensor unit when the cable is tangled with something. Otherwise, the cable may be damaged, which may result in fire or electric shock.

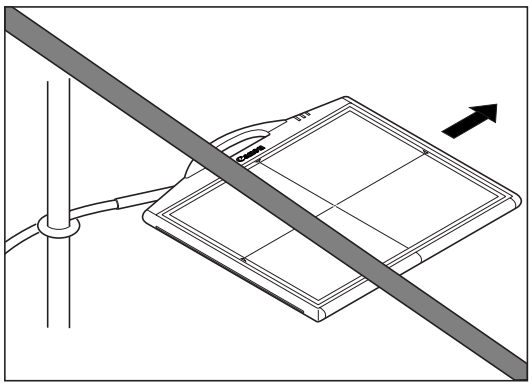

Before Exposure

Sudden heating of the room in cold areas will cause condensation to form on the instrument. In this case, wait until condensation disappears before performing exposure.
If the instrument is used with condensation formed on it, problems may occur in the quality of the instrument.
When an air-conditioner is going to be used, be sure to raise/lower the temperature gradually so that a difference in temperature in the room and in the instrument does not occur, to prevent forming of condensation.

During Exposure

Do not apply excessive weight to the sensor unit. Otherwise, the sensor may be damaged.

Limit of Load

Uniform load: 150 kg over the whole area of sensor unit surface.

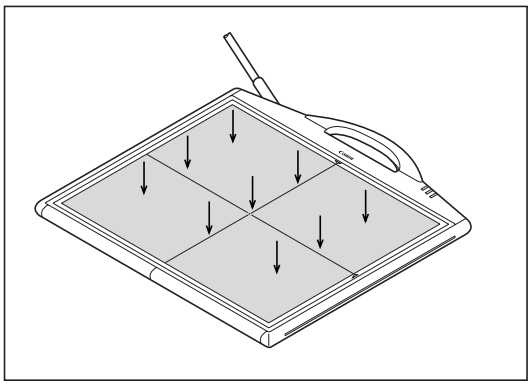

Local load: 100 kg on an area 40 mm in diameter.

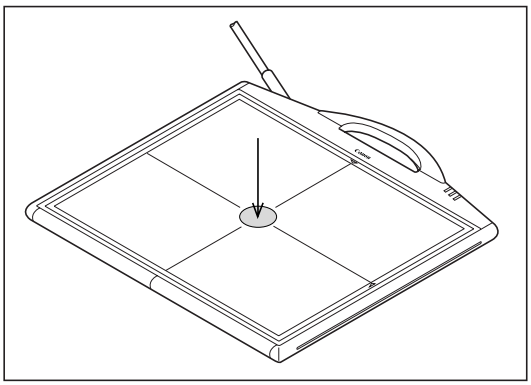

Be sure to use the sensor unit on a flat place so it will not bend. Otherwise, the sensor may be damaged.

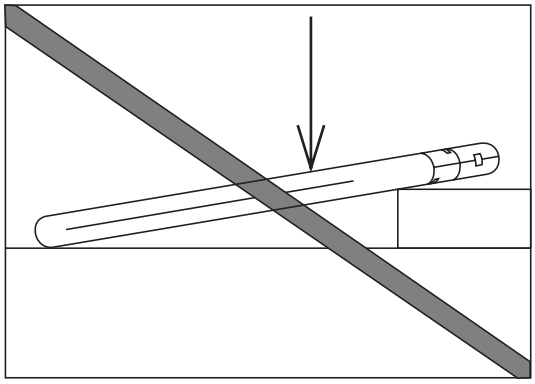

During Cleaning

Do not use anything other than neutral detergent for cleaning the cover of the instrument. Otherwise, the coating will be corroded.

Storage

Be sure to store the sensor unit and the optional grid unit in a safe place where it will not fall or drop.

Others

Be sure to reconnect the cables to the proper connectors. Otherwise, the instrument may malfunction or may be damaged.

3. Description

3.1 Sensor Unit

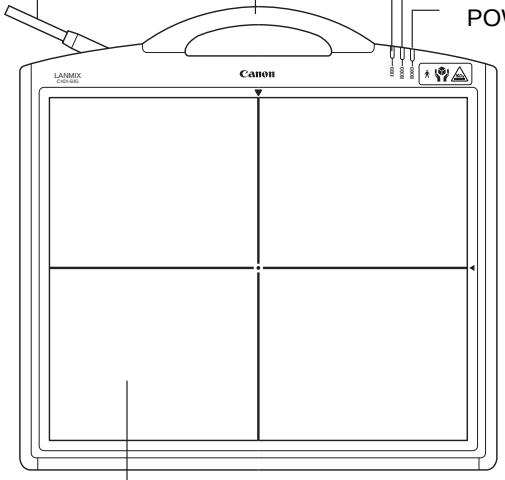

Grip
Hold this grip when carrying the sensor unit.

Sensor cable
Connect this cable to the power box.

BUSY lamp
Blinks when the sensor unit is busy communicating.

SENSOR lamp
Blinks when the sensor unit is ready for exposure or when error has occurred.

POWER lamp
Turns ON when the power of sensor unit is ON.

CFRP (Carbon Fiber Reinforced Plastic) plate
The part of the patient's body to which an image is to be taken should be placed against this plate.
This plate should be disinfected each time a different patient uses the instrument in order to prevent infection.

3.2 Power Box

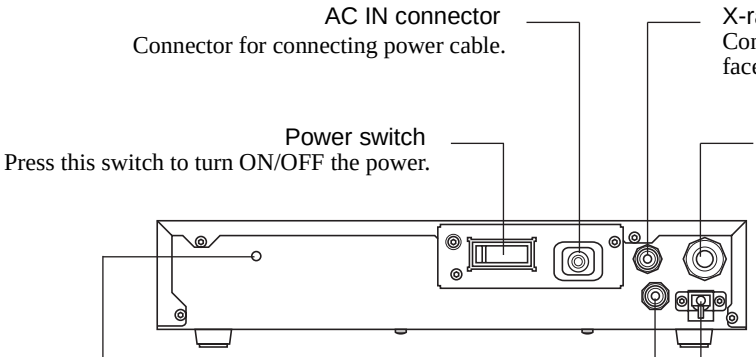
AC IN connector
Connector for connecting power cable.
X-ray I/F cable connector
Connector for connecting X-ray interface cable.
Power switch
Press this switch to turn ON/OFF the power.
Sensor cable connector
Connector for connecting sensor cable.
LAN cable connector
Connector for connecting LAN cable.
Power lamp
Lights when power is ON.
Remote switch connector
Connector for connecting the remote switch when it is difficult to reach the power switch on the power box.

3.3 Remote Switch



Power switch
Power is supplied to the sensor unit when ON side is pressed and terminated when OFF side is pressed.

4. Operation

4.1 Turning ON the Power of the System

(1) Turn ON the power of the power box.

(2) Turn ON the remote switch if it is connected to the power box.

(3) Turn ON the power of the control PC and start the system.

4.2 Turning OFF the Power of the System

NOTE: Never turn OFF the power of the control PC during shutting down the system. Otherwise, it may result in malfunction, damage of the product, or loss of data.

(1) Shut down the system by referring to the CXDI Control Software Operation Manual.

(2) After the system shuts down, the power of the control PC automatically turns OFF. Check that the power of the control PC has turned OFF.

(3) Turn OFF the power of the power box and remote switch.

(4) Turn OFF the power of other units.

4.3 Calibration

Calibration is important to ensure that a good image is achieved with the CXDI-50G by obtaining the calibration data of the sensor unit. Perform calibration when exposure conditions have changed significantly.
For procedure for calibrating, refer to “Calibrating the Instrument” in the CXDI Control Software Operation Manual.

5. Inspection and Maintenance

⚠ WARNING	The instrument must be repaired by a qualified engineer only. If it is not repaired properly, it may cause fire, electric shock, or accident.
⚠ CAUTION	For safety reasons, be sure to inspect the instrument before using it.

5.1 Inspection

In order to ensure that the instrument is used safely and normally, please be sure to inspect the instrument before use.
If any problem is found during the inspection, please take measures indicated in this chapter.
If problem still cannot be corrected, please contact Canon representative or distributor.

It is recommended that a record of the inspection by kept by making copies of the check lists in this section, or making a separate check list.

5.1.1 Daily Inspection

5.1.1.1 Before Turning ON the Power

⚠ WARNING	For safety reasons, be sure to turn OFF the power of each instrument when the following inspections are going to be performed. Otherwise, it may result in electric shock.
⚠ WARNING	Clean the plug of the power cable periodically by unplugging it from the AC outlet and removing dust or dirt from the plug, its periphery and AC outlet with a dry cloth. If the cable is kept plugged in for a long time in a dusty, humid or sooty place, dust around the plug will attract moisture, and this could cause insulation failure which could result in a fire.

Inspection	Result			Remedy
	Date /	Date /	Date /	
Check that cables are not damaged or cover of cables is not torn.	Good/Bad	Good/Bad	Good/Bad	Contact Canon or distributor if there is any problem.
Check that the cables are properly connected to the connectors and the AC outlet.	Good/Bad	Good/Bad	Good/Bad	Connect the cables properly.
Check that the cover or parts are not damaged and not loose.	Good/Bad	Good/Bad	Good/Bad	Contact Canon or distributor if there is any problem.

5.1.1.2 After Tuning ON the Power

Inspection	Result			Remedy
	Date /	Date /	Date /	
Check that power lamp is lit.	Good/Bad	Good/Bad	Good/Bad	Connect the power cable and sensor cable properly.
Perform test exposure.	Good/Bad	Good/Bad	Good/Bad	Take measures if error message is displayed by referring to the CXDI Control Software Operation Manual. Contact Canon or distributor if the problem cannot be solved.

5.1.2 Monthly Inspection

Perform the following inspection periodically more than once a month. Contact Canon representative or distributor if you cannot do it.

Inspection	Result			Remedy
	Date /	Date /	Date /	
Check the performance of the instrument by performing exposures using a phantom or a resolution chart, or perform self-test.	Good/Bad	Good/Bad	Good/Bad	Refer to the CXDI Control Software Operation Manual for the procedure for self-test. Contact Canon or distributor if there is any problem.

5.1.3 Yearly Inspection

Perform the following inspection periodically more than once a year. Contact Canon representative or distributor if you cannot do it.

Inspection	Result			Remedy
	Date /	Date /	Date /	
Check the performance of the instrument by performing an exposure using a phantom or resolution chart.	Good/Bad	Good/Bad	Good/Bad	Contact Canon or distributor if there is any problem.

5.1.4 Calibration

Perform calibration when exposure conditions have changed significantly.
See the CXDI Control Software Operation Manual for the procedure for calibration.

5.2 Cleaning

5.2.1 CFRP (Carbon Fiber Reinforced Plastic) Plate of the Sensor Unit

Disinfect the CFRP plate of the sensor unit each time a different patient uses the instrument. If the optional grid unit is being used, disinfect its surface.

⚠ WARNING	Wipe the CFRP (carbon fiber reinforced plastic) plate of the sensor unit with ethanol or glutaraldehyde solution to disinfect them each time a different patient uses the instrument, in order to prevent infection. If the optional grid unit is being used, disinfect its surface. Please consult a specialist for the procedure for disinfection. If you are using disinfectant other than those specified above, or you are mixing another disinfectant with ethanol, please also consult a specialist, because they may harm the CFRP plate and grid unit.

5.2.2 Cover

Clean the cover by the following procedure if it is dirty.

⚠ WARNING	When the instrument is going to be cleaned, be sure to turn OFF the power of each instrument, and unplug the power cable from the AC outlet. Never use benzine, thinner or any other flammable cleaning agents. Otherwise, fire or electric shock may result.

(1) Shut down the system by referring to section 3.2.

(2) Turn OFF the power of remote switch, power box and control PC.

(3) Turn OFF the power of other connected instruments.

(4) Unplug the power cables of each instrument from the AC outlet.

(5) Wipe the cover with a piece of cloth soaked in neutral detergent diluted in water and wrung dry.

(6) Wipe the cover with a piece of cloth soaked in water and wrung dry whenever neurtral detergent has been used.

6. Service Information

Repair

If problem cannot be solved even after taking the measures indicated in chapter 5, contact Canon representative or distributor for repair.
Please refer to the name label and let us have the following information:

Name of the unit:	It is indicated on the name label.
Serial number:	6-digit number indicated on the name label.
Phenomenon:	In detail.

Limit for Supplying Performance Parts for Repair

Performance parts* of this product will be stocked for eight years after discontinuance of production, to allow for repair.

* Parts required to maintain the functioning of the product

7. Specifications

7.1 Main Specifications

Purpose	General radiography
Pixel size	160µm × 160 µm
Image matrix size	2208 × 2688 pixels
Number of pixels	Approx. 5.9 million pixels
Dynamic range	Approx. 80 dB
Resolution	3.1 lp/mm
Gray scale	12-bit, 4,096 gray scale
Environmental requirements	Operation: Temperature: +5 to +35°C Humidity: 30 to 75%RH (no condensation) Storage and transportation: Temperature: -30 to +50°C Humidity: 10 to 60%RH (no condensation) Atmospheric pressure: 700 to 1060hPa

Sensor Unit

Power	Supplied from the power box.
Dimensions and mass	
Sensor unit	491 (W) × 477 (H) × 23 (D) mm, 4.8 kg (without sensor cable)
Sensor cable	7m type: 7 m, 0.9 kg 3m type: 3 m, 0.4 kg

Power Box

Power	100-120VAC, 50/60Hz, 1.5A 200-240VAC, 50/60Hz, 0.8A
Dimensions and mass	358 (W) × 75 (H) × 200 (D) mm, 4.2 kg

7.2 Characteristics

7.2.1 Clinical Considerations

Required patient doses: Equivalent to exposure dose of 200 or 400 speed film/screen system.

7.2.2 Nonclinical considerations

(1) Sensitometric characteristics and dynamic range

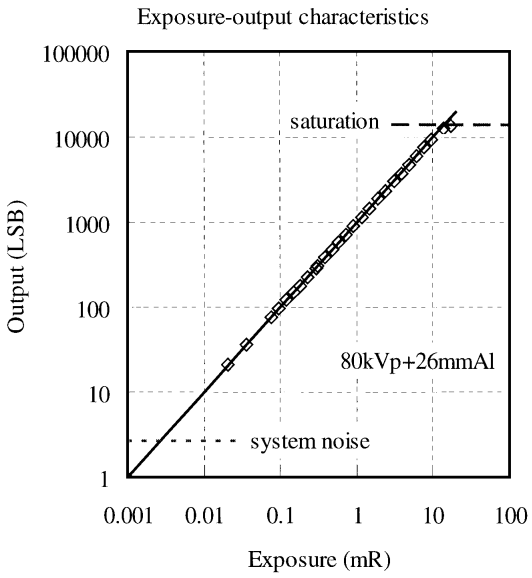

Dynamic range is determined by the levels of system noise and saturation.
The level of uncertainty is estimated to be less than ±10%.

(2) Presampling MTF

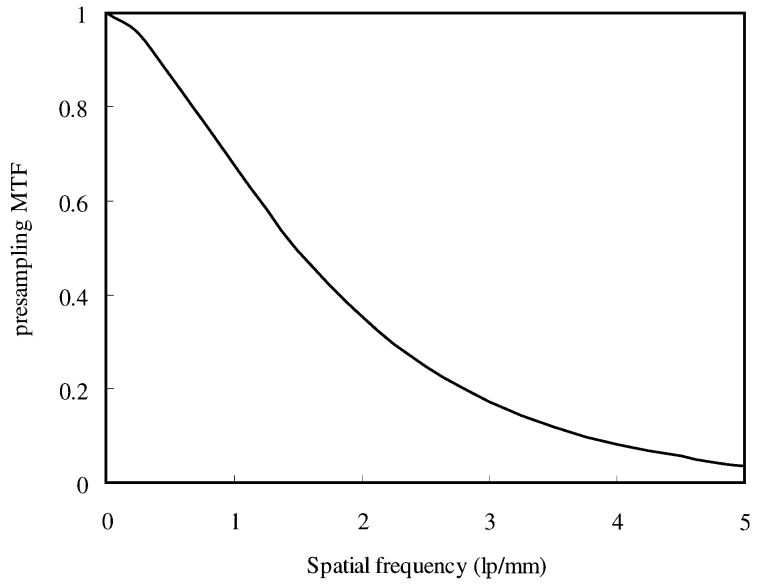

The level of uncertainty is estimated to be less than ±2% or ±0.015, whichever is greater.

(3) DQE

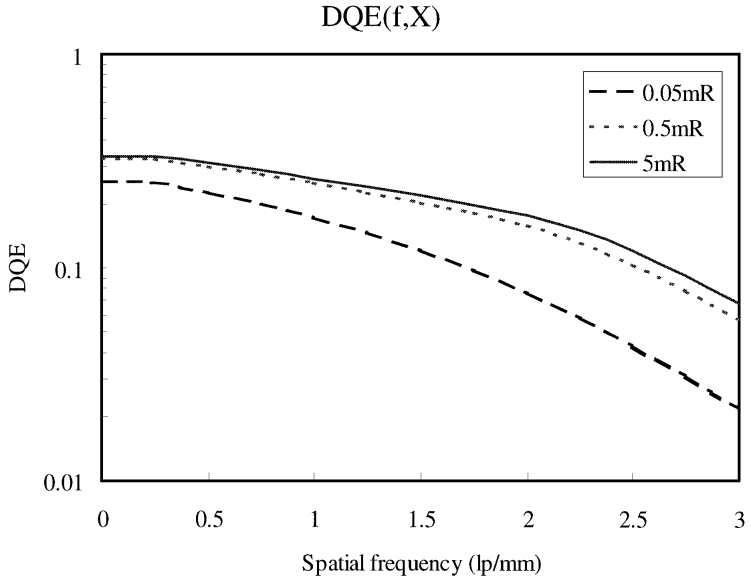

The level of uncertainty is estimated to be less than ±10% or 0.02, whichever is greater.

8. Components

Sensor unit.....1

Power box.....1

Remote switch 1

Cables .....1 set

Installation parts .....1 set

Options

Grid unit for CXDI-50G

Grid: 40 line/cm, 10:1, 180 cm
40 line/cm, 8:1, 110 cm
40 line/cm, 6:1, 150 cm
40 line/cm, 4:1, 110 cm

9. Dimensions

9.1 Sensor Unit

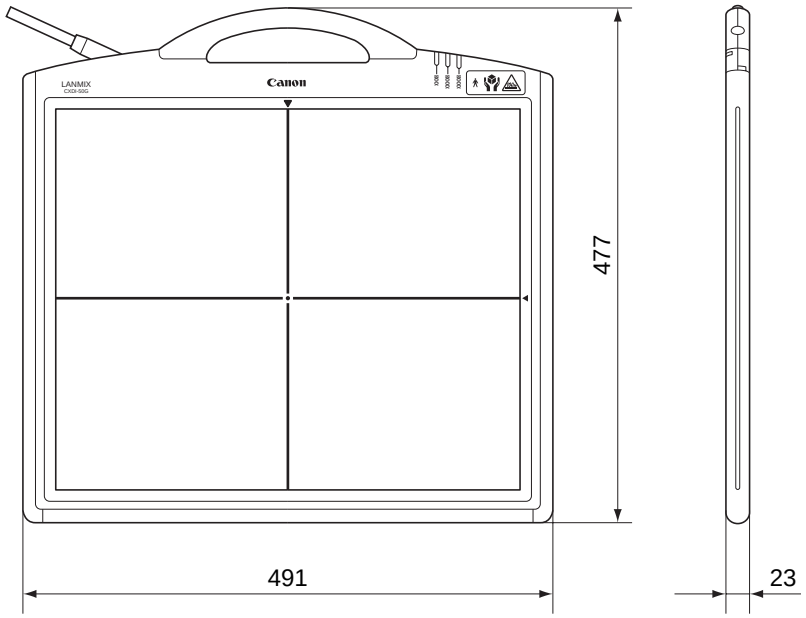

Unit: mm

9.2 Power Box

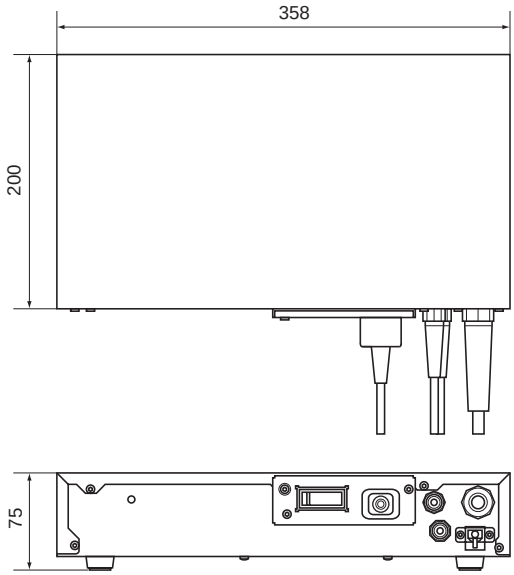

Unit: mm

9.3 Remote Switch

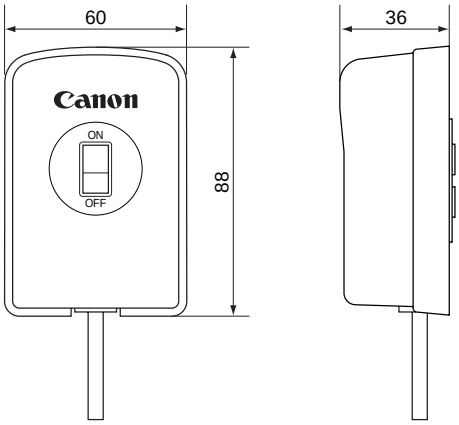

Unit: mm

Appendix: Attaching the Optional Grid Unit

Attach the optional grid unit to the sensor unit by the procedure indicated below.

NOTE: Structure of grid unit is delicate. Do not drop, knock over, bend, or apply force or jolt to it. Otherwise, the unit may be damaged.
When the grid unit is not in use, remove it from the sensor unit and store it in a safe place where it will not fall.
Even if it is not extremely damaged, its characteristics may be changed, which may cause a problem in image quality.

(1) Blow off the dust on the front and back of the grid unit.

(2) Place the sensor unit horizontally on a table.

(3) Hold the grid unit with both hands and engage the hooks on the bottom of the grid unit to the holes on the bottom of the sensor unit.

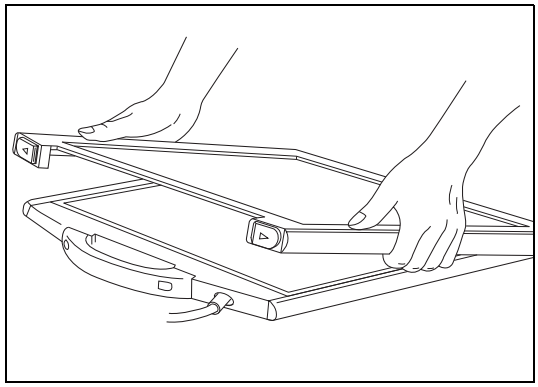

(4) Gently set the grid unit over the sensor unit. A click sound is heard when the grid unit is locked properly.
NOTE: Ensure that the grid unit is locked before lifting the sensor unit. Otherwise, the grid unit will fall and be damaged.

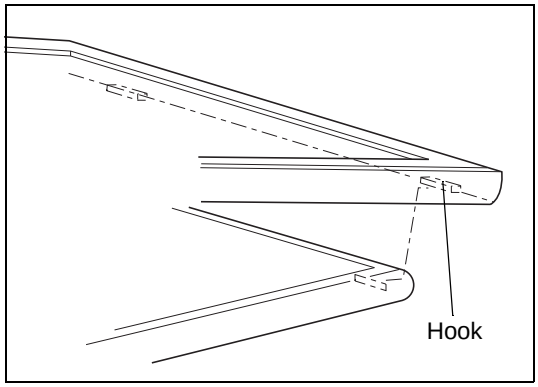

(5) To remove the grid unit
While sliding the locks on top of the grid unit outward, lift and remove the grid unit.

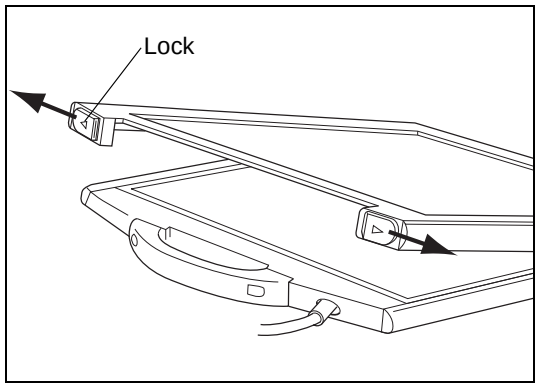

CANON INC.
20-2 Kiyohara-Kogyodanchi, Utsunomiyashi, Tochigiken, Japan
Telephone: (81)-28-667-5711

CANON MEDICAL SYSTEMS
15955 Alton Parkway, Irvine, CA 92618-3616, U.S.A.
Telephone: (1)-949-753-4160

CANON EUROPA N.V.
Bovenkerkerweg 59-61, 1185 XB Amstelveen, The Netherlands
Telephone: (31)-20-545-8926

PUB. L-IE-4094C 0000P0.000 Printed in Japan